

Lansweeper LsAgent Installing Packages in JAMF Remote

When you install a package, you can do the following:

- Fill user templates.
- Fill existing user home directories.
- Add the package to Autorun data.
- Specify a distribution point for computers to download the package from.

There are two ways to install a package on computers:

⇒ Using a policy or using Jamf Remote.

Note: You can also install packages during imaging. For more information, see [Configurations](#).

Requirements

To install a package on computers, the package must exist on the distribution point you plan to deploy it from and in Jamf Pro. (For more information, see [Managing Packages](#).)

Installing a Package Using a Policy

1. Log in to Jamf Pro.
2. Click **Computers** at the top of the page.
3. Click **Policies**.
4. Click **New** .
5. Use the General payload to configure basic settings for the policy, including the trigger and execution frequency.
For an overview of the settings in the General payload, see [General Payload](#).
6. Select the Packages payload and click **Configure**.
7. Click **Add** for the **LsAgent package** you want to install.
8. Choose "Install" from the **Action** pop-up menu.
9. Configure the settings for the package.
To add the package to each computer's Autorun data, select the **Update Autorun data** checkbox. For more information, see [Autorun Imaging](#).
10. Specify a distribution point for computers to download the package from.
11. Use the Restart Options payload to configure settings for restarting computers.
For more information, see [Restart Options Payload](#).
12. Click the **Scope** tab and configure the scope of the policy.
For more information, see [Scope](#).
13. Click **Save**.


The policy runs on computers in the scope the next time they check in with Jamf Pro and meet the criteria in the General payload.

Installing a Package Using Jamf Remote


1. Open Jamf Remote and authenticate to the Jamf Pro server.
2. Click **Site** and choose a site.
This determines which items are available in Jamf Remote.

Note: This button is only displayed if you have a site configured in Jamf Pro and are logged in with a Jamf Pro user account that has full access or access to multiple sites.

3. In the list of computers, select the checkbox for each computer on which you want to install the package.

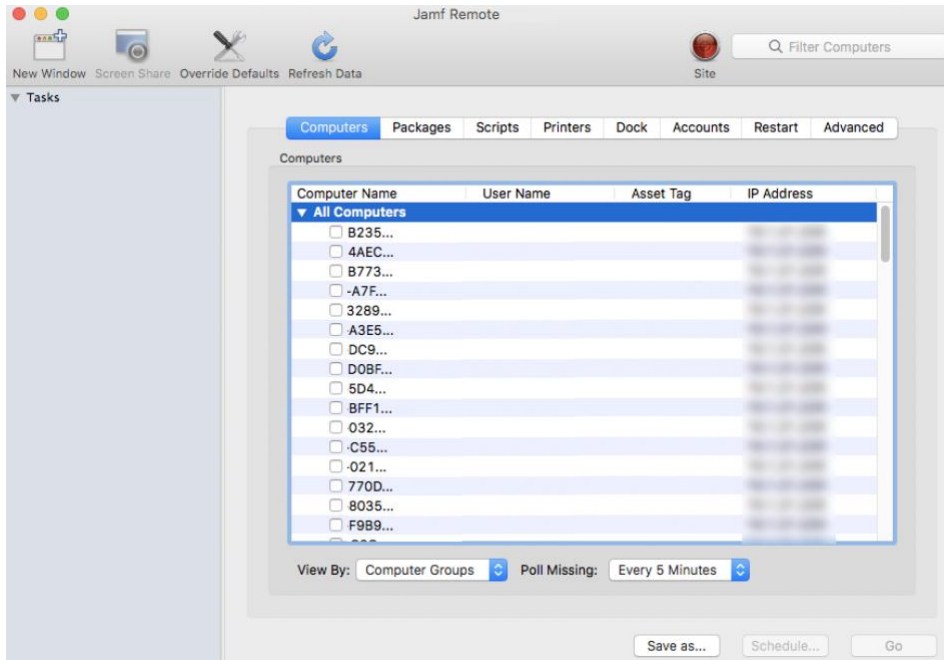

4. Click the **Packages** tab.
5. In the list of packages, select **LsAgent MAC** package you want to install.

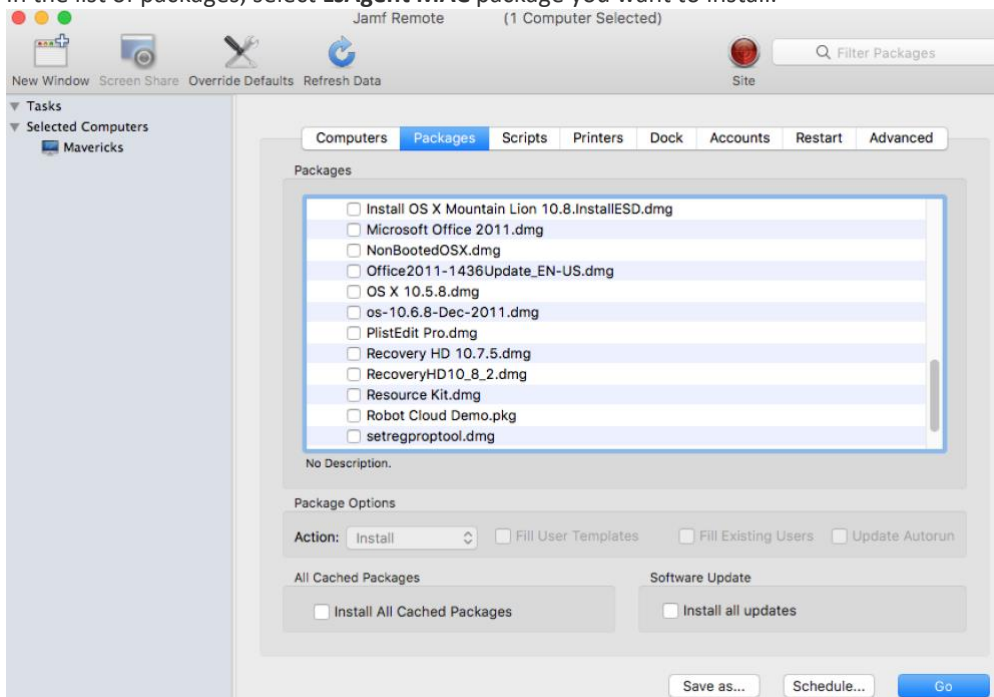


6. Choose "Install" from the **Action** pop-up menu.


LOGON Software Asia Limited

Email: sales@logon-int.com Website: www.logon-int.com

7. Configure the settings for the package.
To add the package to each computer's Autorun data, select the **Update Autorun data** checkbox. For more information, see [Autorun Imaging](#).
8. If you want to change the distribution point that computers download packages from, click **Override Defaults** and choose a distribution point.

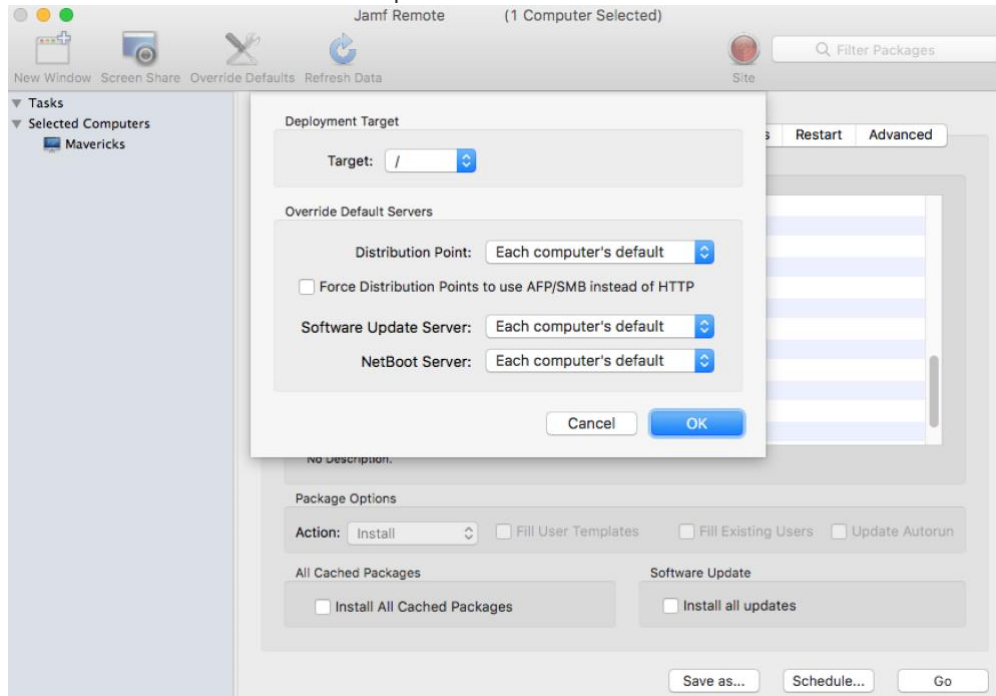

9. Click the **Restart** tab and configure settings for restarting computers.

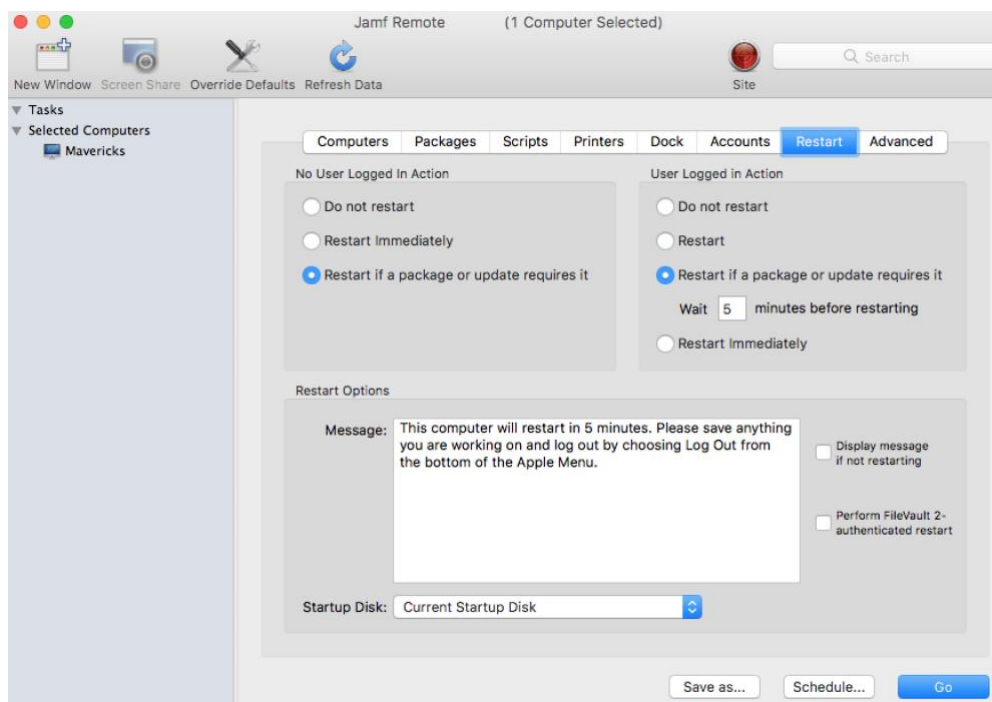

10. Do one of the following:
- To immediately perform the tasks on the specified computers, click **Go**.
 - To schedule the tasks to take place at a specific day and time, click **Schedule** and choose a day and time. Then click **Schedule** again.

Reference:

https://docs.jamf.com/10.1.0/jamf-pro/administrator-guide/Installing_Packages.html

<https://www.youtube.com/watch?v=h3DUkq5Rbgg>

https://docs.jamf.com/10.1.0/jamf-pro/administrator-guide/Autorun_Imaging.html